


TR6000WX-PRO-01

Wall-Mounted Energy Storage




System Topology

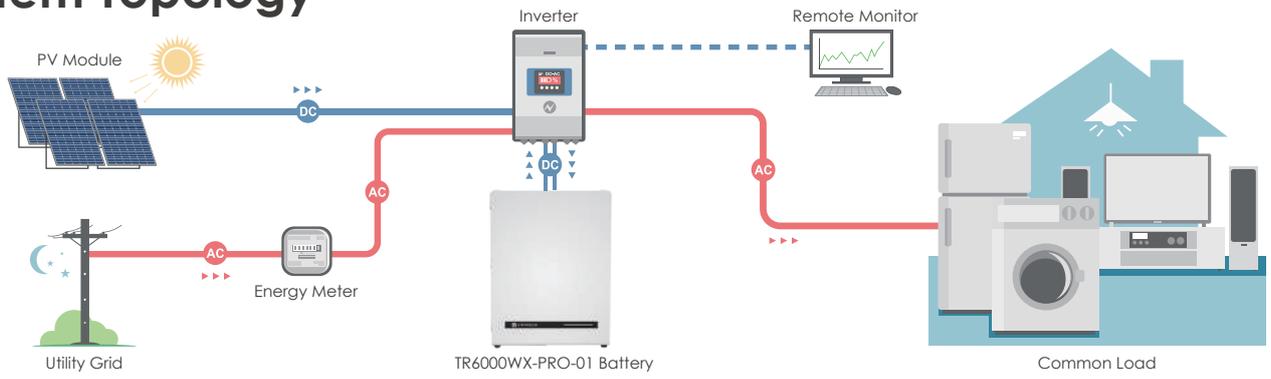

Product-Highlights

Anti-Corrosion & UV Resistance

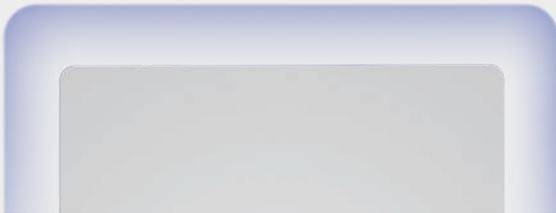

40% Thinner

150mm



8000 Cycles*




Fire Extinguishing Equipment



Intelligent BMS
Multi-Safety Protection



Lithium Iron
Phosphate Material
High Efficiency

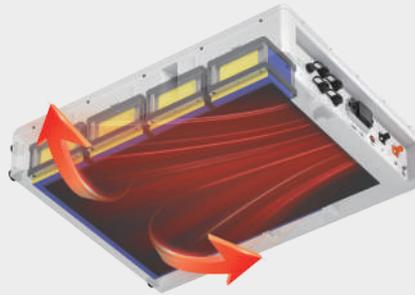

Self-Heating Technology**
Work Under -20°C



Multi Functional
Indicator Light




Noise Level < 30dB
Quiet And Comfortable



*8000 Times 80% DOD;

Product Introduction

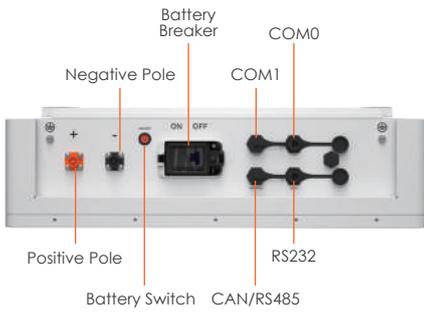

Technical Parameter

Model	TR6000WX-PRO-01
Nominal Voltage	51.2V
Nominal Capacity	200Ah
Charge & Discharge Current	200A
Energy	10.24kWh
Chemistry	LiFePo4
Cycle life	8000 Times 80% DOD
Rated Output Power	10kW
Certification	CE, UN38.3, RoHS, MSDS
Communication	RS485, Ethernet, CAN
WIFI/BT	Optional
Self-Heating	Optional
Waterproof	IP66
Noise Level	<30dB
Charge Temperature	0°C to 55°C (32°F to 131°F)
Discharge Temperature	-20°C to 60°C (-4°F to 140°F)
Recommend Operating Temperature	15°C to 35°C (59°F to 95°F)
Storage Temperature	0°C to 35°C (32°F to 95°F)
Altitude	≤3000m
Warranty	10 Years
Dimensions(L×W×H)	85×65×16.7cm
Weight	~99.5kg



Cleaner Energy, Simplified Life!

SHENZHEN LITHTECH ENERGY CO.,LTD

Email: info@lith-tec.com

Add: 14th Floor, Block D, Central Avenue, Xixiang Street, Bao'an District, Shenzhen
©2025 by Shenzhen Lithtech Energy Co., Ltd. All rights reserved. Specifications and features are subject to change without prior notice. Brand names and logos are trademarks of their respective owners.

CONTACT US:

